


High Pressure Plunger Pump - TR-65

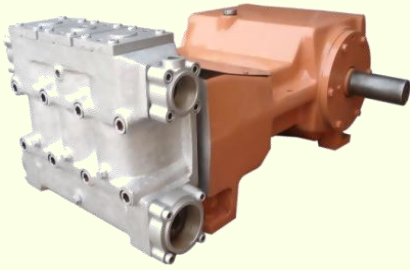


Material of Construction

- **Liquid end:** - SS 304 / SS 316 / Duplex SS
- **Plunger :** - Ceramic coating/Tungsten Carbide coating /Hard Chrome
- **Valve & Valve Seat:** - Stainless Steel
- **Plunger Seal:** - PTFE Aramide
- **Crank Shaft:** - SG Iron
- **Pump Body:** - FG 260

Major Applications

- **Hydro Test**
- **Transfer**
- **Injection**
- **Reverse Osmosis**
- **Process**
- **Cleaning & many more...**

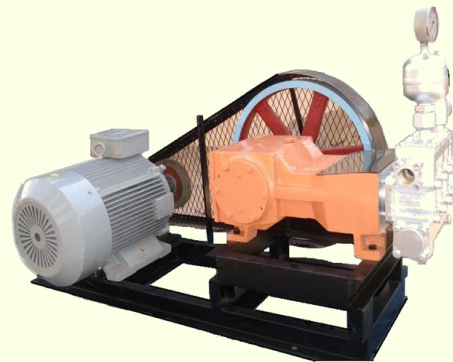

Technical Data Chart

PARAMETER	DESCRIPTION
Capacity Range	Min. Flow rate 69 LPM (18.23 GPM) @ max. Pressure 170 Kg/cm ² (2417.97 PSI) Max. Flow rate 307 LPM (81.10 GPM) @ max. Pressure 64 Kg/cm ² (910.29 PSI)
Pump Speed Range	300 To 500 SPM
Motor HP	Up to 60 HP
Transmission	Belt/Gear Drive

Complete System Includes Following Accessories: Bare Pump, Electric Motor/Diesel Engine, Belt & Pulley/Gear Box, Pressure Regulating Valve, Safety Valve, Pulsation Dampner, Strainer, Pressure Gauge etc. Other accessories like Trolley, Starter, Cable, Control panel etc. can also be supplied as per specific requirements of client.

PressureJet Systems Pvt. Ltd.

(An ISO 9001-2008 CERTIFIED COMPANY)

62/13, Phase-1, G.I.D.C. Vatva, Ahmedabad – 382445. Gujarat, India

Phone: + 91 – 79 – 25830762 / 25893868 / 32455727, Fax: +91-79-25897220

E-Mail: sales@pressurejet.com • URL: www.pressurejet.com