


High Pressure Plunger Pump - PA

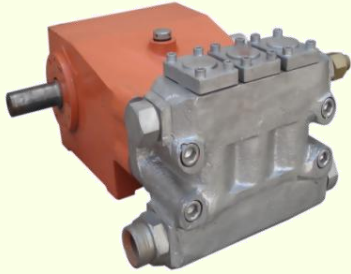

Material of Construction

- **Pump Head:** - CF 8 (SS 304)
- **Plunger :** - Ceramic coating/Tungsten Carbide coating
- **Valve & Valve Seat:** - Stainless Steel
- **Plunger Seal:** - PTFE Aramide
- **Crank Shaft:** - S G Iron – Hardened & Ground
- **Pump Body:** - FG 260

Major Applications

- **Hydro Test**
- **Cleaning**
- **Tube cleaning**
- **Sewer jetting**
- **Live wire insulator**
- **Spraying & many more...**



PA Series Model Selection Chart

Model	SPM	Flow (LPM)	Max. Rated Pressure-kg/cm ² (MOTOR-HP)		
PA 30	950	80	180(40)	130(30)	80(20)
	730	61	180(30)	-	-
	610	51	180(25)	130(20)	-
PA 32	950	91	150(40)	125(30)	100(25)
	730	70	150(30)	125(25)	100(20)
	610	58	150(25)	125(20)	98(15)
PA 36	950	115	120(40)	99(30)	80(25)
PA 40	730	110	100(30)	75(25)	50(15)
PA 45	730	139	100(40)	75(30)	50(20)

Complete System Includes Following Accessories: Bare Pump, Electric Motor/Diesel Engine, Belt & Pulley/Gear Box, Pressure Regulating Valve, Safety Valve, Strainer, Pressure Gauge etc. Other accessories like Trolley, Starter, Cable, Control panel etc. can also be supplied as per specific requirements of client.

PressureJet Systems Pvt. Ltd.

(An ISO 9001-2008 CERTIFIED COMPANY)

62/13, Phase-1, G.I.D.C. Vatva, Ahmedabad – 382445. Gujarat, India

Phone: + 91 – 79 – 25830762 / 25893868 / 32455727, Fax: +91-79-25897220

E-Mail: sales@pressurejet.com • URL: www.pressurejet.com